




FAW05 Series

悬挂式全伺服机械手

FULL SERVO ROBOT

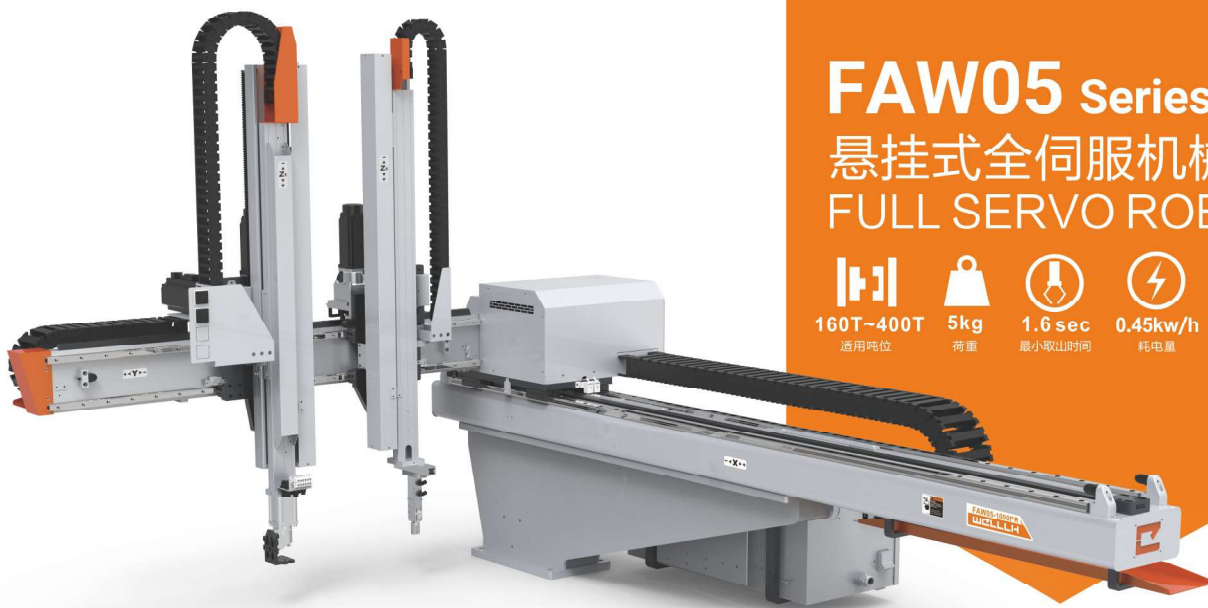

160T~400T
适用吨位



5kg
荷重



1.6 sec
最小取出时间



0.45kw/h
耗电量






1.0NL/cycle
空气消耗量

Specifications 主要规格

机型 MODEL	手臂 型式 Type	适用 注塑机 Suitable I.M.M.	行程 Stroke					姿势角度 Gripper angle	最大荷重 (含夹具) Max load (includes gripper)	最小取出 时间 Minimum take out time	驱动方式 Driving Mode	工作气压 Working Air pressure	空气消耗量 Air Consumption	最大所要 电力 Maximum power	最大净重 (约) Maximum net weight
			上下 Vertical (有效)	前后 Crosswise (最大)	双臂前后 Double arms Crosswise (有效)	单臂前后 Single arms Crosswise (有效)	横行 Transverse (有效)								
FAW05-1100P	双臂 (倍速式) Telescopic type	160~400	1100	1000	/	820 (180~1000)	1600 1800	90	5	1.6	X,Y,Z轴 伺服马达 XYZ AC Servo motor	0.5~0.8	1.0 (※)	AC220V±10% 10A 50/60Hz (单相 Single phase)	360
FAW05-1100PR					P:550 (450~1000) R:550 (145~695)	/								AC220V±10% 12A 50/60Hz (单相 Single phase)	400

* 空气消耗量:每使用1组吸盘需另外消耗1.2t (NL), t为一个循环周期中吸打开的时间 (s)
Air consumption:an additional 1.2t (NL) is required for each set of vacuum generators, t is the time (s) of using the vacuum generator in one cycle

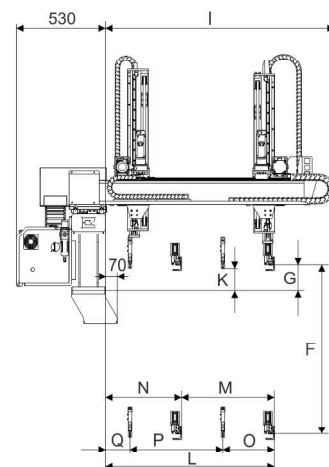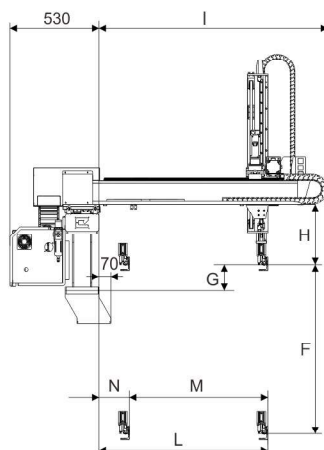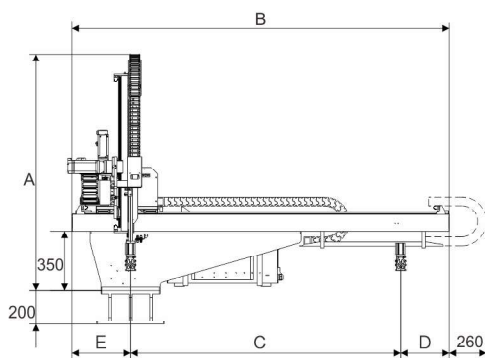

Outer Dimensions 尺寸图表

机型 MODEL	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	Q
FAW05-1000P	1400	2240	1600	290	350	1000	180	320	1355	/	1000	820	180	/	/	/
FAW05-1000PR																

因改良等原因,规格及外观有所变更时,不再另行通知,敬请谅解
Without further notice if specification and exterior have been changed because of improvement. Thanks for your understanding.
※表示为标准行程 ※Represents the standard stroke



FAW10 Series

悬挂式全伺服机械手

FULL SERVO ROBOT



300T~800T
适用吨位



10kg
荷重



2.0 sec
最小取出时间



0.7kw/h
耗电量




2.0NL/cycle
空气消耗量

Specifications 主要规格

机型 MODEL	手臂 型式 Type	适用 注塑机 Suitable I.M.M.	行程 Stroke					姿势角度 Gripper angle	最大荷重 (含抓具) Max load (includes gripper)	最小取出 时间 Minimum take out time	驱动方式 Driving Mode	工作气压 Working Air pressure	空气消耗量 Air Consumption	最大所要 电力 Maximum power	最大净重 (约) Maximum net weight
			上下 Vertical (有效)	前后 Crosswise (最大)	双臂前后 Double arms Crosswise (有效)	单臂前后 Single arms Crosswise (有效)	横行 Transverse (有效)								
FAW10-1300P	双段 (倍速式) Telescopic type	300~500	1300	1250	/	1120 (130~1250)	2000	90	10	2.0	X,Y,Z轴- 伺服马达 X,Y,Z AC Servo motor	0.5~0.8	2.0 (※)	AC220V±10% 14A 50/60Hz (单相 Single phase)	530
FAW10-1300PR			P:1300 R:1350		P: 865 (385~1250) R: 865 (175~1040)	/								AC220V±10% 17A 50/60Hz (单相 Single phase)	560

※空气消耗量:每使用1组吸盘需另外消耗1.2t (NL), t为一个循环周期中吸打开的时间 (s)

Air consumption:an additional 1.2t (NL) is required for each set of vacuum generators, t is the time (s) of using the vacuum generator in one cycle

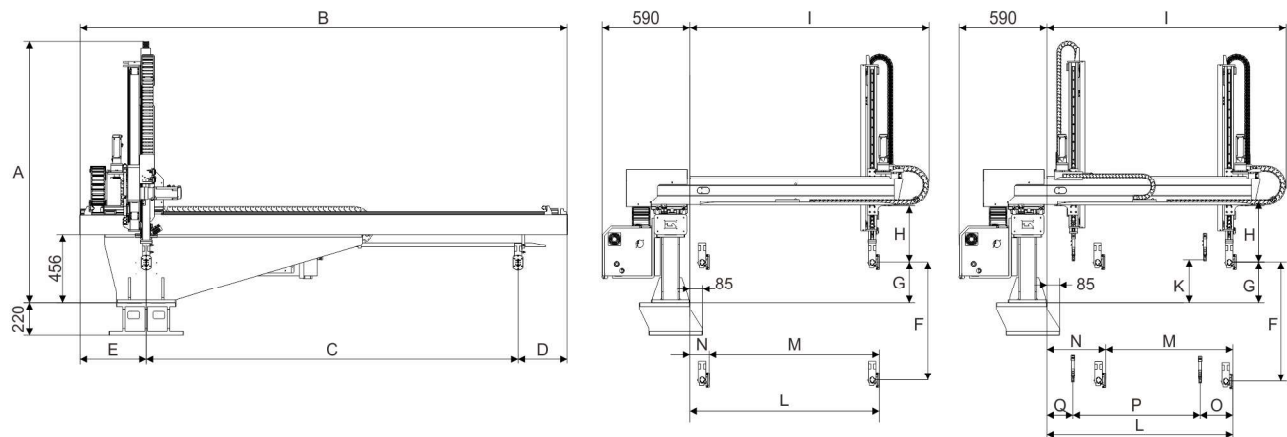

Outer Dimensions 尺寸图表

机型 MODEL	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	Q
FAW10-1300P	1670	2775	2000	330	445	1300	270	380	1610	/	1250	1120	130	/	/	/
FAW10-1300PR	1760									285		865	385	210	865	175

因改良等原因, 规格及外观有所变更时, 不再另行通知, 敬请谅解

Without further notice if specification and exterior have been changed because of improvement. Thanks for your understanding.

※表示为标准行程 ※Represents the standard stroke



FAW 15 Series

悬挂式全伺服机械手

FULL SERVO ROBOT



800T~1300T
适用吨位



15kg
荷重



3.0 sec
最小取出时间



0.75kw/h
耗电量





3.0NL/cycle
空气消耗量

Specifications 主要规格

机型 MODEL	手臂 型式 Type	适用 注塑机 I.M.M.	行程 Stroke				姿势角度 Gripper angle	最大荷重 (含夹具) Max load (includes gripper)	最小取出 时间 Minimum take out time	驱动方式 Driving Mode	工作气压 Working Air pressure	空气消耗量 Air Consumption	最大所要 电力 Maximum power	最大净重 (约) Maximum net weight
			上下 Vertical (有效)	前后 Crosswise (最大)	单臂前后 Single arms Crosswise (有效)	横行 Transverse (有效)								
		ton	mm	mm	mm	mm	o	kg	s		MPa	NL/cycle		kg
FAW15-2000P	双段 (倍速式) Telescopic type	800~1300	2000	1665	1390 (275~1665)	3000	90	15	3.0	X,Y,Z轴- 伺服马达 X,Y,Z-AC Servo motor	0.5~0.8	3.0 (*)	AC220V±10% 17.5A 50/60Hz (单相 Single phase)	1110

* 空气消耗量:每使用1组吸需另外消耗1.2t (NL), t为一个循环周期中吸打开的时间 (s)

Air consumption:an additional 1.2t (NL) is required for each set of vacuum generators, t is the time (s) of using the vacuum generator in one cycle

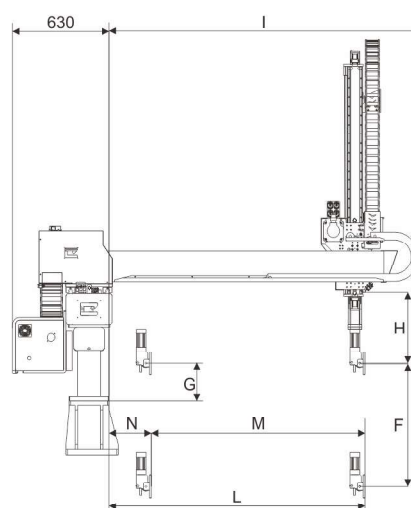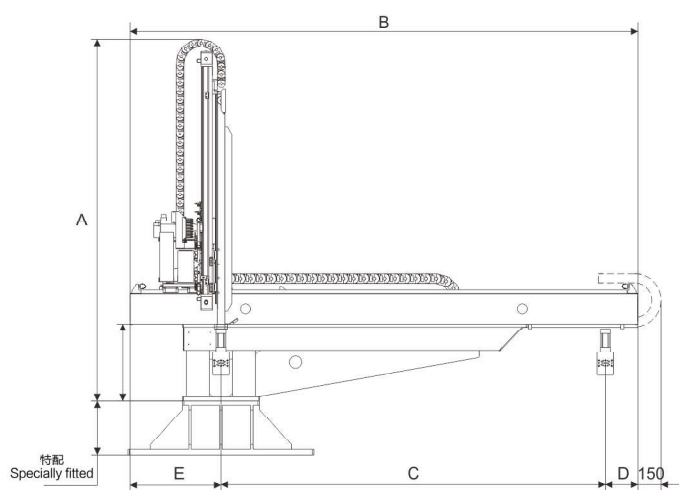

Outer Dimensions 尺寸图表

机型 MODEL	A	B	C	D	E	F	G	H	I	L	M	N
FAW15-2000P	2360	3800	3000	180	620	2000	245	460	2015	1665	1380	285

因改良等原因, 规格及外观有所变更时, 不再另行通知, 敬请谅解

Without further notice if specification and exterior have been changed because of improvement. Thanks for your understanding.

※表示为标准行程 ※Represents the standard stroke